

D6P_B3A

240W - 270W

Multi-Crystalline Photovoltaic Module



Positive power tolerance
0~+4.99 watt



Withstand strong wind/snow load up to 5400 Pa
Pass ASTM E330; Maximum wind speed: 197 km/h (safety factor 3)
(Short-side installation \geq 2400 Pa guaranteed)



Excellent low light performance
3.5% relative eff. reduction at low-irradiance ($200\text{W}/\text{m}^2$)




100% EL inline inspection
Better module reliability



Prolonged aging test
2000 hours damp heat test; 400 thermal cycles



Ammonia resistance
According to IEC 62716 Ed. 1



Reliability & Certification


Product guarantee: 10-year

Linear Performance Warranty

- 1-year: 97% power output
then power degradation 0.7% per year till 25th year
- 25-year: 80.2% power output
- 10-year: 90.7% power output

IEC 61215 / IEC61730, CE, MCS, UL1703, CEC

* Please refer to NSP product warranty for details

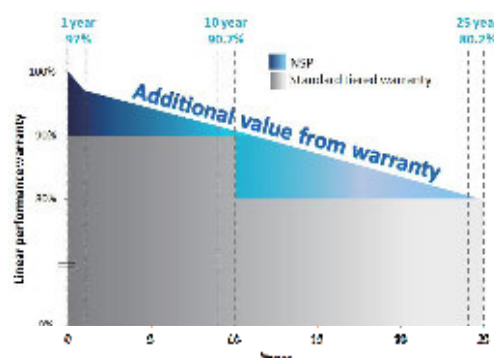

For more information, please visit us at www.nsp.com



NEO SOLAR POWER

Electrical Data

MODEL	D6P 240 B3A	D6P 245 B3A	D6P 250 B3A	D6P 255 B3A	D6P 260 B3A	D6P 265 B3A	D6P 270 B3A	†D6P 275 B3A
Maximum Rating Power (Pmax)	240 W	245 W	250 W	255 W	260 W	265 W	270 W	275 W
Module Efficiency	14.8%	15.1%	15.4%	15.7%	16.0%	16.3%	16.6%	16.9%
Open Circuit Voltage (Voc)	36.99 V	37.16 V	37.33 V	37.50 V	37.67 V	38.17 V	38.39 V	38.63 V
Maximum Power Voltage (Vpm)	29.76 V	30.05 V	30.34 V	30.64 V	30.93 V	30.97 V	31.04 V	31.18 V
Short Circuit Current (Isc)	8.54 A	8.61 A	8.69 A	8.76 A	8.83 A	9.02 A	9.15 A	9.23 A
Maximum Power Current (Ipm)	8.06 A	8.15 A	8.24 A	8.32 A	8.43 A	8.58 A	8.73 A	8.85 A

*Electrical data under Standard Test Conditions (STC): Cell Temperature of 25 °C, Irradiance 1000 W/m², AM 1.5

*Values w/o tolerance are typical numbers; specifications subject to change

†275W for IEC 61215 / IEC61730, CE, MCS only

Mechanical Data

Item	Specification
Dimension	1640 mm (L) x 992 mm (W) x 40 mm (D) / 64.5" (L) x 39.1" (W) x 1.57" (D)
Weight	18.5 kg / 40.8 lbs
Solar Cell	60 multicrystalline 6" silicon cells
Front Glass	Anti-reflective tempered solar glass, 3.2mm thickness
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Cover	Composite film, white
Junction Box	IP 67 rated
Frame	Anodized aluminum frame, original or black
Packaging Configuration	26 pcs Per Pallet, 728 pcs Per 40' HQ container

Operating Conditions

Item	Specification
Mechanical Load	5400 Pa (Certified by TUV Rheinland)
Maximum System Voltage	DC 1000 V
Series Fuse Rating	15 A
Operating Temperature	-40 to 85 °C

Temperature Characteristics


Item	Specification
Nominal Operating Cell Temperature	44 °C ± 2 °C
Temperature Coefficient of Isc	0.046 % / °C
Temperature Coefficient of Voc	-0.313 % / °C
Temperature Coefficient of Pmax	-0.420 % / °C

* Nominal Operating Cell Temperature (NOCT): Irradiance 800W/m², Ambient Temperature 20 °C, Wind Speed 1 m/s


* Please refer to NSP's Standard Module Installation Manual before using the product

* Reduction in efficiency from 1000 W/m² to 200 W/m² at 25 °C: 3.5% ± 2 %


Front View & Back View

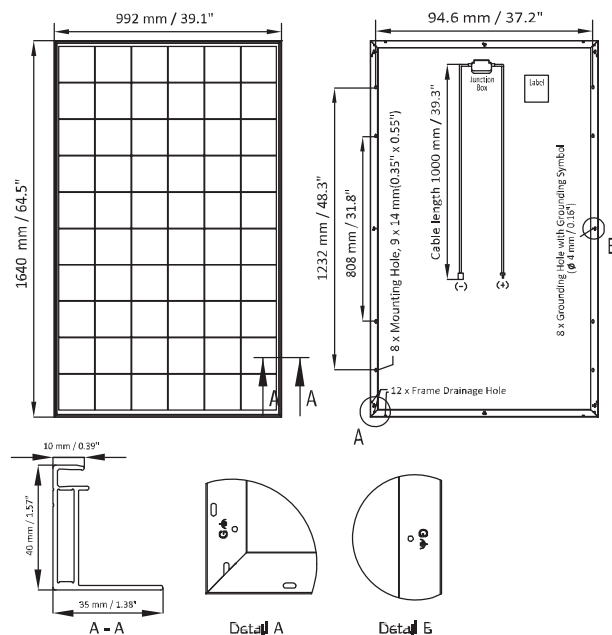

Dependence on Temperature

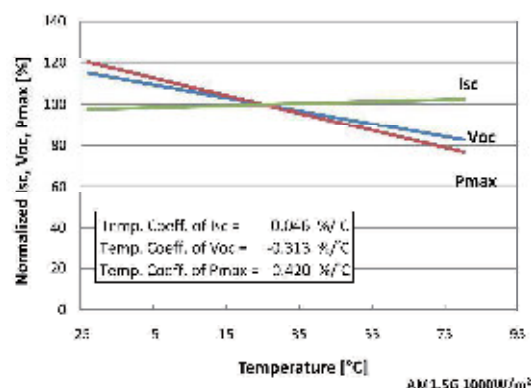

Dependence on Irradiance

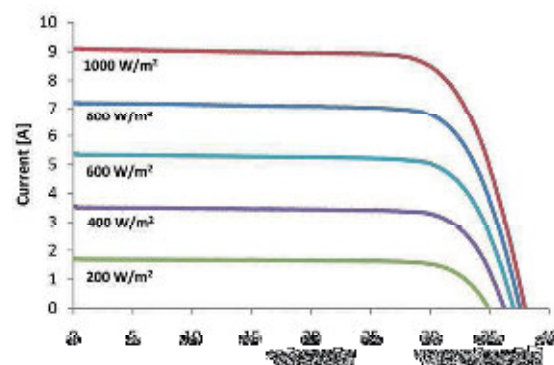

Contact Us

Neo Solar Power Corporation

Headquarters: 7, Li-Hsin 3rd Rd., Hsinchu
Science Park, Hsinchu, 30078, Taiwan

Tel: +886-3-578-0011
Fax: +886-3-578-1255

www.nsp.com

Email: sales.module@nsp.com
Website: www.nsp.com